

# Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:  
Single product


## **Rationel AURAPLUS / Rationel FORMAPLUS** – Glazed entrance door, inward opening

From

**rationel**<sup>®</sup>

Programme:	The International EPD <sup>®</sup> System, <a href="http://www.environdec.com">www.environdec.com</a>
Programme operator:	EPD International AB
EPD registration number:	S-P-07601
Publication date:	2024-05-28
Valid until:	2029-03-15

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)*

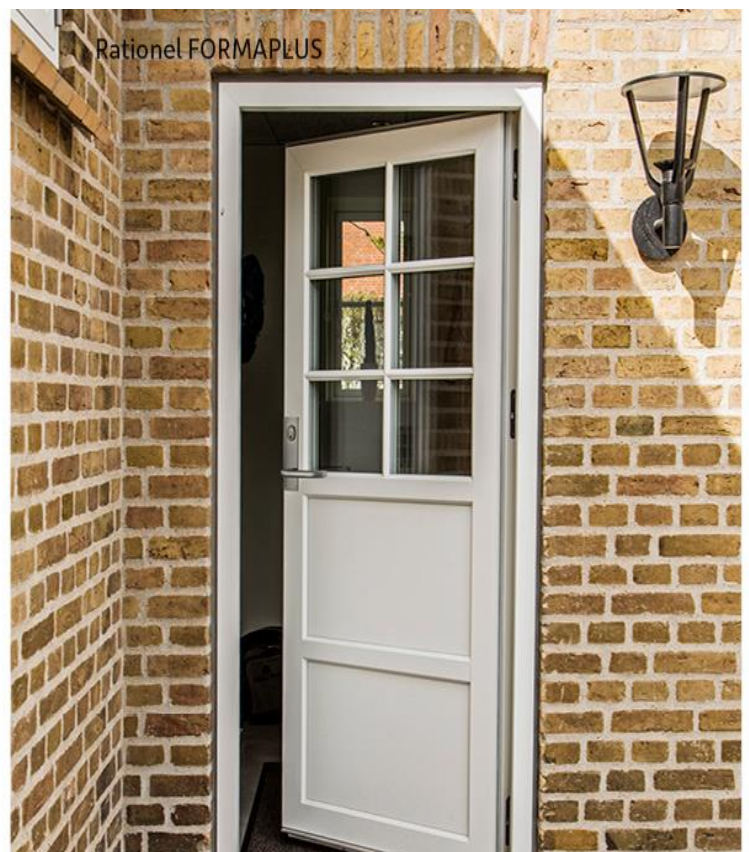

## General information

### Programme information

<b>Programme:</b>	The International EPD® System
<b>Address:</b>	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
<b>Website:</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>E-mail:</b>	<a href="mailto:info@environdec.com">info@environdec.com</a>

<b>Accountabilities for PCR, LCA and independent, third-party verification</b>
<b>Product Category Rules (PCR)</b>
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product Category Rules (PCR): <i>PCR 2019:14 Construction products (EN 15804:A2) (1.3.2)</i> <i>PCR 2019:14-c-PCR-007 c-PCR-007 Windows and doors (EN 17213) (2020-04-09)</i>
PCR review was conducted by: <i>CEN Technical Committee</i> <i>The review panel may be contacted via the Secretariat <a href="http://www.environdec.com/contact">www.environdec.com/contact</a>.</i>
<b>Life Cycle Assessment (LCA)</b>
LCA practitioner: Anna Pantze and Emanuel Lindbäck at Tyréns Sverige AB
<b>Third-party verification</b>
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:  <input checked="" type="checkbox"/> EPD verification by individual verifier  Third-party verifier: <i>Daniel Böckin, Marcus Wendin, Miljögiraff AB</i>  Approved by: The International EPD® System  Procedure for follow-up of data during EPD validity involves third party verifier:  <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programs, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

## Company information

Owner of the EPD: Rationel, Dalgas Allé 7, 7400 Herning, Denmark

Contact:

Manoli Ly Pedersen,  
Global Product Sustainability Specialist, Dovista  
Tel. direct +45 6025 1653  
E-mail maly@dovista.com

Description of the organisation:

Rationel creates windows and doors that frame our everyday lives. To provide the best setting for daily life and the best conditions for a safe, bright, and vibrant home. A home with new possibilities and functions.

We take pride in being present for our customers. Having built a solid, long-lasting community with our business partners we can provide strong local roots. Meaning, we are always near when you need us. With 60 years of experience, we operate on a solid foundation which means that we will be here both today and going forward.

Rationel is a Danish based company with sales activities in Denmark, United Kingdom and Ireland. Rationel is a part of DOVISTA, that is one of the leading manufacturers of facade windows and doors in Europe.

DOVISTA is a part of the VKR Group.  
Rationel is a trademark used under license by DOVISTA A/S, CVR-no. 21147583.

Product-related or management system-related certifications:

Rationel window and door systems are third party Q-Mark certified. BM TRADA operates the Q-Mark product certification for construction products, which is based on the Product Certification Standard EN 45011. Rationel is registered in the BM Trada database under our parent company DOVISTA A/S.

In the UK Rationel windows and doors are compliant with Part Q of the Building Regulations.

Name and location of production site(s):

DOVISTA Polska Sp. z o.o. · Wędkowy · PL-83-115 Swarzędz

## Product information

Product name: Rationel AURAPLUS / Rationel FORMAPLUS – Glazed entrance door, inward opening

Product description:

The Rationel inward opening entrance door with aluminium cladding can be made as Rationel AURAPLUS or Rationel FORMAPLUS. The results in this LCA study will reflect both products as the materials in the doors are the same, with a small difference in material weight.

The life cycle inventory includes weights for the Rationel AURAPLUS model. There are the following differences between the products:

Rationel AURAPLUS contains about 300 grams more wood than Rationel FORMAPLUS.  
Rationel AURAPLUS contains about 250 grams less aluminium than Rationel FORMAPLUS.

The Rationel AURAPLUS glazed doors are made of a solid wood structure with the addition of an external aluminium cladding. It is a modern, minimalistic style of door and is characterized by clean lines.

The Rationel AURAPLUS glazed entrance doors can be manufactured as inward or outward opening and as single or double leaf. All doors are made to be entirely bespoke, with colours and styles selected to suit each individual. Furthermore, different vision panels and glazing options are available, e.g., the glazed doors can be divided by glazing bars, and fixed sidelights and top lights can be added. Glazing can be triple-glazed or double-glazed as per requirement.

Rationel FORMAPLUS glazed doors are made of a solid wood structure with the addition of an external aluminium cladding. The door range comes with angled glazing beads and ovolo moulded profiles and is well suited for classic, traditional architecture.

The Rationel FORMAPLUS glazed entrance doors can be manufactured as inward or outward opening and as single or double leaf doors. All doors are made to be entirely bespoke, with colours and styles selected to suit each individual. Furthermore, different vision panels and glazing options are available, e.g. the glazed doors can be divided by glazing bars, and fixed sidelights and toplights can be added. Glazing can be triple-glazed or double-glazed as per requirement.

Aluminium clad doors provide superior protection against the elements, displaying high levels of durability while retaining excellent thermal efficiency. In addition, the aluminium clad doors require minimal maintenance.

Rationel AURAPLUS/FORMAPLUS glazed doors are available in a wide range of styles and are well suited to accompany the Rationel AURAPLUS/FORMAPLUS window system.

All window and door units are made to measure, drained, and ventilated, and factory finished. They are manufactured in accordance with EN 14351-1:2006 + A2:2016.

Opening functions are tested to and third-party verified for a wide range of conditions including resistance to wind load, water tightness, air permeability, load-bearing capacity of safety devices. Please refer to the Declaration of Performance document (DoP) for the product system and see the performance tested for each specific opening function.

For frames, sashes, mullions, and transoms we use FSC-certified pine from North European forests, licence code FSC®-C101947.

We use a water-based diffusion open timber surface treatment, system 2ØKO from Teknos A/S, which is certified by VinduesIndustrien (the Danish Window Industry), and our windows and doors are Danish Indoor Climate certified.

#### **Approach to chemicals (hazardous substances)**

We seek to protect the environment and therefore demand our suppliers to secure, that their products comply with relevant law concerning hazardous substances.

Suppliers are required to sign our Code of Conduct and Hazardous Substances Restriction. Please see <https://dovista.com/interesseret/leverandoer/>

Our Hazardous Substances Restrictions Appendix A list does not allow neither products that contain restricted substances in concentrations that exceed the maximum concentration values listed in applicable Relevant Laws, nor products that exceed the maximum concentration values restricted due to DOVISTA internal requirements. Please see <https://dovista.com/interesseret/leverandoer/hazardous-substances-restriction/>

Our Appendix A list, which is regularly updated according to Relevant Laws, contains Material / Chemical substances related to the following regulations and directives:

- REACH Registration, Evaluation and Authorisation of Chemicals (REACH) European Union (1907/2006/EC) (annex XIV, annex XVII and candidate list). The candidate list may be found at 'Candidate List of substances of very high concern for Authorisation', please see <https://echa.europa.eu/candidate-list-table>
- Restrictions of Hazardous Substances (RoHS) European Union (65/2011/EU)
- Battery Directive (2006/66/EC)
- Packaging and Packaging Waste Directive (EU) 2018/852 + (94/62/EC)
- CLP Regulation (EC) No 1272/2008 (Regulation on classification, labelling and packaging of substances and mixtures (EC) No 1272/2008)
- Biocidal Product Regulation (528/2012/EU)
- Substances that deplete the ozone layer Regulation (1005/2009/EC)
- Persistent Organic Pollutants Regulation (2019/1021/EU) + (2020/1021/EU)
- Conflict Minerals (EU) 2017/821 + (EU) 2019/821

UN CPC code: 54

Geographical scope:

Module A1 and A2 Material suppliers are Global

Module A3 production is located in Poland

Module A5, C and D scenarios are for Europe

## LCA information

Functional unit / declared unit: 1 m<sup>2</sup> door

Standard size is 1230 x 2180 mm

Conversion factor for the product is 39.1 kg per m<sup>2</sup>

Reference service life: Not declared

Time representativeness: The LCA is based on production data from 2021 but is deemed to be representative of an average year of production.


Database(s) and LCA software used: The LCA software is Simapro Flow and the database is Ecoinvent 3.9.1. When modelling in Simapro, Ecoinvent data (updated November 2022) has been used for generic data.

Description of system boundaries:

Cradle to gate (A1-A3), installation (A5), end of life (C1–C4) and benefits beyond system boundary (D) (A1–A3 + A5+ C + D)



## System diagram:

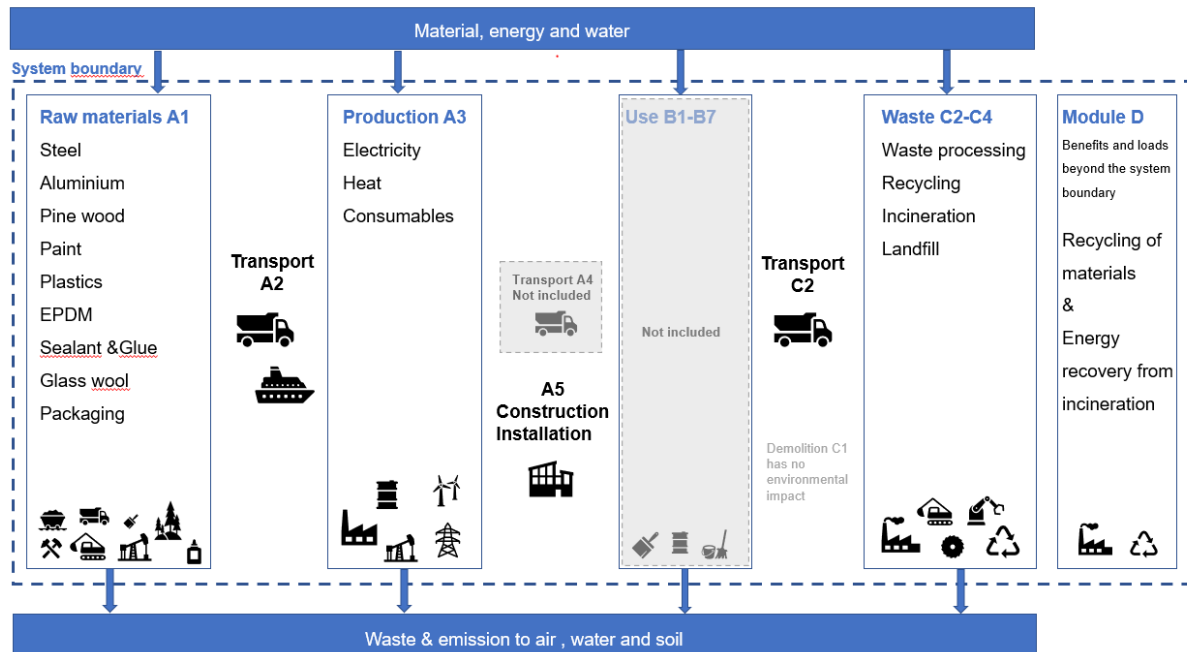

## Production

Main materials used for production:

- Wood: main raw material used is finger joined and glued pine scantlings supplied by FSC labelled suppliers only. Optionally, raw oak solid material is used.
- Aluminum: extruded profiles are produced in EU; later profiles are either powder coated in Poland or anodized in Denmark or Germany.
- Glass: double or triple glazed units supplied by suppliers in EU.
- Paint: water-based paint that can be tinted to more than 200 colors, incl. clear lacquer.

Around 6% of wood and 19% aluminum becomes waste during the production process. Wood waste is utilized internally in own bio boilers that supply heat for both process and heating needs; Aluminum waste is sent for recycling.

All raw materials are processed in one production facility. Production process consists of 3 main flows:

- Wood production. Wood material is cut to length, profiled, milled, impregnated, painted, and assembled into doors frames and sashes.
- Alu production. Aluminum profiles are cut to length, drilled/milled and assembled for mounting to the wood sash and frame.
- Final assembly. Frames and sashes are assembled and glass and alu cladding is mounted into complete doors that are adjusted in a way that prevents the need for further adjustments during installation. Doors are then protected with plastic corners, cardboard covers and packed on wooden pallets, secured by wooden planks.

Pallets are wrapped in plastic foil to protect the goods from environmental elements during transport and storage at construction sites.

Produced doors are transported by trucks to distribution centers in Poland and Germany, where they are bundled and sent to final customers.

#### More information:

This EPD is generated with a pre-verified EPD tool. All processes are fixed and variable input data for each window or sliding door i.e constituent material/components (Items) is governed by a menu. The results of the EPD are checked for plausibility. The review of the EPD-generator its constituent processes and the fixed content of the EPD is accepted based on the verification of the tool and the first EPD verification by the tool. Identification name and version number of the EPD-generator: Dovista EPD-generator 3.0.

#### **Electricity data**

Electricity consumption in A3 module (DOVISTA Polska Sp. z o.o. Wedkowy, PL-83-115 Swarozyn) comes from 100% renewable energy according to Certificate RGP STXSERV 2022-08-25 1716 from RGP.

RGP declares a renewable energy mix of 99 % wind power and 1% solar. Climate impact for the renewable energy mix is 0,025 kg CO<sub>2</sub>eq. per kWh (GWP-GHG).

#### **Estimates and assumptions**

All transport in A2 and C2 is with EURO 5 trucks.

In the C module the end-of-life scenario considered is that the door is demounted during the deconstruction process and no separate energy from machine is required for this process.

The used sliding door is transported in its entirety to a municipal waste collection and sorting station, the average transport distance from the demolition place to the station is assumed to be 50km.

After demolition of the sliding door:

- 70% of the glass cassette is assumed to be transported 50km to a facility for landfill and disposed. The remaining 30% is transported 50km for material recycling.
- 95% of the aluminum, steel and zinc is assumed to be transported 50km to a facility where its treated (fragmentized and sorted). 5% is assumed to be transported 50km to facility for landfill and disposed.
- 95% of the wood frame is assumed to be transported 50km to a facility where its treated (chipped) and incinerated. 5% is assumed to be transported 50km to facility for landfill and disposed.

For calculations in Module D following assumptions have been made:

The recycled steel and aluminum are replacing production of primary steel and aluminum.

Module D also contains benefits from exported energy from waste incineration declared in module C.

Exported energy assumed to be 77 % heat and 23 % electricity from incineration.

The infrastructure or capital goods used in the product system for underlying processes are included, as infrastructure or capital goods can not be excluded in SimaPro FLOW. Therefore results of the impact categories abiotic depletion of minerals and metals, land use, human toxicity (cancer), human toxicity, noncancer and ecotoxicity (freshwater) may be highly uncertain in LCAs that include capital goods/infrastructure in generic datasets, in case infrastructure/capital goods contribute greatly to the total results. This is because the LCI data of infrastructure/capital goods used to quantify these indicators in currently available generic datasets sometimes lack temporal, technological and geographical representativeness. Caution should be exercised when using the results of these indicators for decision-making purposes.

**Background data**

The data quality of the background data is considered good. The assessment considers all available data from the production process, including all raw materials and auxiliary materials used as well as the energy consumption in relation to available Ecoinvent 3.9.1 datasets and EPD's.

EPD used for background data in EPD-tool:

EPD Pressglas, Insulating glass units Double and triple glass configurations. M-EPD-MIG-GB-002036  
EPD Pilkington, Insulating glass units S-P-02592  
TEKNOS EPD, Water-borne varnishes and furniture paints and coatings. RTS\_15\_18 RTS Building Information  
EPD Mill finished and fabricated aluminum profiles S-P-06710  
EPD Barrus, laminated wood, EPD HUB, EPD number 0100

**Data quality**

When modeling in Simapro, Ecoinvent data (updated November 2022) has been used for generic data. The database is considered to be of high quality. For some material supplier's product specific and third party verified EPD's has been used. The EPD's used is of high quality.

In data is gathered from the actual manufacturing plant with product-specific processes, specific amounts, specific waste and spillage %, specific energy mix, specific transportation distances and transportation type and EPD's from some of the suppliers. All together 80% of specific data specific data is used in this EPD.



Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	ND	X	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	EU	EU	PL	ND	EU	ND	ND	ND	ND	ND	ND	ND	EU	EU	EU	EU	EU
Specific data used	80% *					-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	not relevant					-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	not relevant					-	-	-	-	-	-	-	-	-	-	-	-

\* The percentage of specific data is assumed to be larger than 60% in EPD\*s, but it cannot be proved since one or several EPDs that are used as data sources lack information on the percentage of specific data used.

## Content information

Product components	Weight, kg	Post-consumer material, weight-%	Renewable material, weight-%
Plastic	0.5	0.0 %	-
Steel	0.8	20.2 %	-
EPDM	0.6	0.0 %	-
Wood	13.1	0.0 %	-
Paint	0.9	0.0 %	-
Insulated Glass unit	20.0	0.0 %	-
Aluminium	2.6	7.3 %	-
Glass fibre	0.5	0.0 %	-
Zinc	0.1	0.0 %	-
TOTAL	39.1	0.9 %	-
Packaging materials	Weight, kg	Weight-% (versus the product)	
Steel	0.0	0.0 %	
Wood	1.6	4.0 %	
Plastic	0.1	0.1 %	
Cardboard & Paper	0.1	0.3 %	
TOTAL	1.7	4.4 %	
Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight-% per functional or declared unit
not relevant	-	-	-

## Environmental Information

### Potential environmental impact – mandatory indicators according to EN 15804

Results per m <sup>2</sup>								
Indicator	Unit	A1-A3	A5	C1	C2	C3	C4	D
GWP-fossil	kg CO <sub>2</sub> eq.	7.41E+01	2.32E-02	0.00E+00	6.91E-01	2.24E-01	8.70E-02	-3.22E+01
GWP-biogenic	kg CO <sub>2</sub> eq.	-2.03E+01	2.53E+00	0.00E+00	6.24E-04	2.03E+01	1.06E+00	0.00E+00
GWP-luluc	kg CO <sub>2</sub> eq.	2.00E+00	8.96E-06	0.00E+00	3.35E-04	1.94E-04	1.73E-05	-3.77E-01
GWP-total	kg CO <sub>2</sub> eq.	5.57E+01	2.56E+00	0.00E+00	6.92E-01	2.05E+01	1.14E+00	-3.26E+01
ODP	kg CFC 11 eq.	6.81E-07	6.24E-10	0.00E+00	1.50E-08	2.90E-09	3.07E-09	-7.90E-07
AP	mol H <sup>+</sup> eq.	1.46E-01	5.08E-04	0.00E+00	2.25E-03	1.07E-03	5.55E-04	-2.01E-01
EP-freshwater	kg P eq.	2.40E-02	1.76E-06	0.00E+00	4.83E-05	4.74E-05	4.10E-06	-1.33E-02
EP-marine	kg N eq.	9.08E-02	2.36E-04	0.00E+00	7.74E-04	5.09E-04	2.41E-04	-2.30E-02
EP-terrestrial	mol N eq.	3.54E-01	2.73E-03	0.00E+00	8.18E-03	4.00E-03	2.58E-03	-2.33E-01
POCP	kg NMVOC eq.	1.29E-01	7.52E-04	0.00E+00	3.36E-03	1.27E-03	1.04E-03	-9.24E-02
ADP-minerals&metals*	kg Sb eq.	1.42E-03	6.33E-08	0.00E+00	2.22E-06	1.72E-06	9.35E-08	-7.65E-05
ADP-fossil*	MJ	1.08E+03	3.32E-01	0.00E+00	9.79E+00	2.25E+00	2.24E+00	-4.23E+02
WDP*	m <sup>3</sup>	1.55E+01	3.11E-02	0.00E+00	5.69E-02	6.30E-02	1.14E-01	-3.05E+01
Acronyms		GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption						

*Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C. Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.*

*\* The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.*

## Potential environmental impact – additional mandatory and voluntary indicators

Results per m <sup>2</sup>								
Indicator	Unit	A1-A3	A5	C1	C2	C3	C4	D
GWP-GHG <sup>1</sup>	kg CO <sub>2</sub> eq.	7.61E+01	2.32E-02	0.00E+00	6.91E-01	2.25E-01	8.70E-02	-3.26E+01

*Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C. The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.*

## Use of resources

Results per m <sup>2</sup>								
Indicator	Unit	A1-A3	A5	C1	C2	C3	C4	D
PERE	MJ	7.55E+02	4.84E-03	0.00E+00	1.52E-01	1.69E-01	4.43E-02	4.69E+01
PERM	MJ	2.67E+02	0.00E+00	0.00E+00	0.00E+00	-2.38E+02	-1.25E+01	0.00E+00
PERT	MJ	1.02E+03	4.84E-03	0.00E+00	1.52E-01	-2.38E+02	-1.25E+01	4.69E+01
PENRE	MJ	1.11E+03	3.57E-01	0.00E+00	1.04E+01	2.39E+00	2.39E+00	-4.53E+02
PENRM	MJ.	4.18E+01	0.00E+00	0.00E+00	0.00E+00	-1.15E+01	0.00E+00	0.00E+00
PENRT	MJ	1.15E+03	3.57E-01	0.00E+00	1.04E+01	-9.08E+00	2.39E+00	-4.53E+02
SM	kg	3.90E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m <sup>3</sup>	2.20E+02	3.95E-02	0.00E+00	1.20E+00	9.95E-01	3.27E-01	-4.46E+02
Acronyms		PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water						

*Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C.*

*\*For the PERM and PENRM the new "GUIDANCE TO CALCULATING THE PRIMARY ENERGY USE INDICATORS" in Annex 3 of the PCR is followed and calculated according to option A.*

<sup>1</sup> The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

## Waste production and output flows

### Waste production

Results per m <sup>2</sup>								
Indicator	Unit	A1-A3	A5	C1	C2	C3	C4	D
Hazardous waste disposed	kg	2.34E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-hazardous waste disposed	kg	2.40E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Radioactive waste disposed	kg	1.33E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

*Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C*

### Output flows

Results per m <sup>2</sup>								
Indicator	Unit	A1-A3	A5	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	7.82E-01	0.00E+00	0.00E+00	0.00E+00	9.40E+00	0.00E+00	0.00E+00
Materials for energy recovery	kg	4.04E-03	0.00E+00	0.00E+00	0.00E+00	1.33E+01	0.00E+00	0.00E+00
Exported energy, electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, thermal	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

*Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C*

## Additional information

ID: EPD Calculation WV1 Wedkowy PL Dovista 21-02-2024 16:08

## References

Ecoinvent, < <https://ecoinvent.org/the-ecoinvent-database/> >

General Programme Instructions of the International EPD® System. Version 4.0.

PCR 2019:14 Construction products (EN 15804:A2) (1.3.2)

SIS (2022). EN 16757:2022 "Sustainability of construction works – Environmental product declarations – Product Category Rules for concrete and concrete elements". Svenska Institutet för Standarder

SIS (2021). EN 15804:2012+A2:2019, "Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products". Svenska Institutet för Standarder



